

America's
#1 Quality
Skirting System

EVERLOCK

DELUXE PREMIUM SKIRTING

**BACKED BY
A LIFETIME
NON-PRORATED
WARRANTY!**

**FEATURING
Triple-Lock Design
Protection**



1 Top Rail Lock

Designed for positive performance in severe weather conditions, the Everlock top rail system traps oversized panel tabs in a deep locking channel.

2 Panel Lock

Designed to individually lock each panel together for extra strength and secure fit. Your best guard against blow-out.

3 Bottom Rail Lock

Designed to firmly anchor over-sized panel tabs in the grooved bottom rail channel. Bottom rail lock does the job when the weather is against you.

Windguard™ Steel Rod Inserts (optional)

24" vertical steel rods provide extra rigid panel system, with strength where and when you need it. If wind is a problem... Windguard is the answer!

Quick Corner™ Eliminate the burden of additional cuts for corners with factory pre-notched rails. The four pre-notched top front and bottom rails provided in every rail kit facilitate a quick n' easy installation.

Safe Everlock Deluxe is flame-retardant and does not conduct electricity.



WHITE



GREY



BEIGE



TAN



SAND



CLAY

Colors shown may vary from actual product. Samples recommended.


ORDERING GUIDE

EVERLOCK

DELUXE PREMIUM SKIRTING

Home Sizes											
Typical Home Size	8'x 35'	12'x 60'	12'x 65'	12'x 70'	14'x 65'	14'x 70'	14'x 80'	16'x 70'	16'x 80'	28'x 65'	28'x 70'
Linear Ft Less 8' for Hitch	78	136	146	156	150	160	180	164	184	178	188
Number of 12' Skirting Panels Required											
18"	9	13	14	14	15	15	17	16	18	17	18
24"	11	17	19	20	19	20	23	21	23	23	24
28"	13	21	22	24	23	24	27	25	28	27	29
29" - 36"	17	26	28	30	29	30	34	31	35	34	36
42"	22	34	37	39	38	40	45	41	46	45	47
Trim Parts	Number of 11' 7 1/4" Rail Components and Parts										
Top Back Rail	8	13	13	14	14	14	16	14	16	16	17
Top Front Rail	8	13	13	14	14	14	16	14	16	16	17
Bottom Rail	8	13	13	14	14	14	16	14	16	16	17
7" Ground Spikes	60	80	80	80	80	90	100	90	100	100	100
Screw Nails	120	240	240	240	240	260	290	200	290	290	290


*Estimates only. Will vary if terrain is unlevel or if hitch is attached.
Trim Components are 11' 7 1/4" Long; Panel exposure is 12' High x 16" Wide.

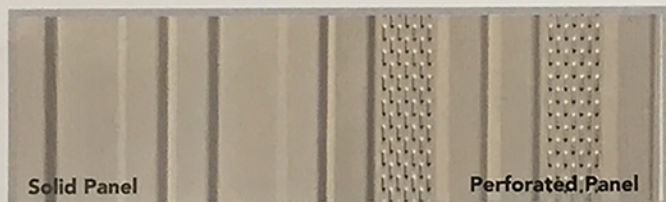

Option #1: Combine Solid with Perforated Panels for Ventilation (e.g. 85% Solid; 15% Perforated)

Perforated Panel Ventilation Information

15.0 in² = square inches of ventilation per linear foot of 16" wide panel. All colors available.

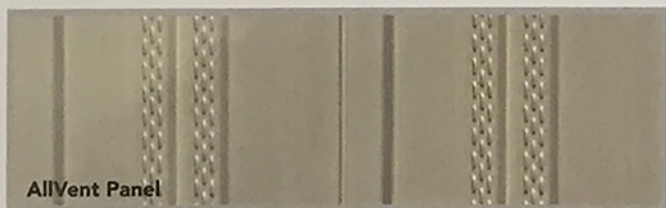


Option #2: Use 100% AllVent Panels Exclusively

AllVent Panel Ventilation Information

6.5 in² = square inches of ventilation per linear foot of 16" wide panel. All colors available.

Measuring for Everlock Deluxe Vinyl Skirting

First, measure the home completely around the perimeter. To figure the average height required, measure the distance between the ground or slab and the bottom edge of the building at each corner and midway along each long side (6 measurements). Total the measurements and divide by 6. Then add 1" to the result.

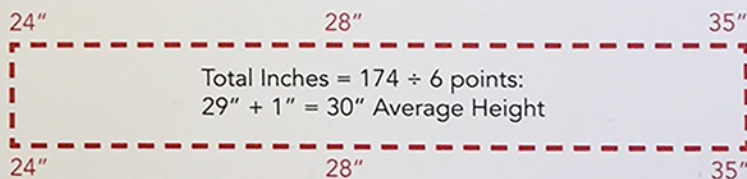

*Estimate Only. Varies with terrain.



Certified lab tests conclusively prove that Everlock skirting provides superior blow-out protection.

The secret behind this phenomenal performance lies in Everlock's advanced Triple-Lock technology.

You can depend on Everlock's top rail, panel lock, and bottom rail systems to give you the edge against the weather.

EVERLOCK SYSTEMS, INC.

ALL STATE MOBILE HOME IMP
1719 FIFTH AVENUE
ARNOLD, PA 15068
1-800-468-5392 - (724) 337-4497
PA012801